

EWELLIX

A Schaeffler Company

Linear actuator Matrix series





Matrix series

The Matrix series is designed for medical devices and includes powerful AC and DC linear actuators using DC motor.

They run very quietly, take up little space and can be installed at virtually every angle in vertical or horizontal position. The series is medical approved by third parties and available with options like anti-pitching, incremental position feedback and emergency lowering. The Matrix series can be supplied as a full system with controls, operating units and accessories.



Features

- Designed for medical devices
- Full system with controls, operating units and accessories
- Back up nut as standard
- Safety factor up to 4

Benefits

- Synchronization possible
- Silent operation
- Compact and aesthetic
- Back-up nut as standard

Matrix1

Linear actuator



Benefits

- Silent operation
- Full system with control unit, switch and accessories
- Synchronization possible
- Compact and aesthetic
- Back-up nut as standard


Technical data

	Unit	MAX1..A..	MAX1..B..	MAX1..C..
Rated push load	N	4 000	2 000	1 500
Rated pull load	N	4 000	2 000	1 500
Speed (full load to no load)	mm/s	5 to 7	6 to 9	13 to 18
Stroke	mm	50 to 700	50 to 700	50 to 700
Retracted length	mm	S + 195/260 ¹⁾	S + 195/260 ¹⁾	S + 195/260 ¹⁾
Voltage	V DC	24	24	24
Power consumption	W	120	120	120
Current consumption	A	5	5	5
Duty cycle	%	10 (1/9)	10 (1/9)	10 (1/9)
Ambient temperature	°C	0 to +40	0 to +40	0 to +40
Degree of protection	IP	66S	66S	66S
Weight (at 200 mm stroke)	kg	4	3,7	3,6
Color	–	Grey	Grey	Grey


¹⁾ S < 350 mm, L = 195 + S
S > 350 mm, L = 260 + S

Dimensional drawing


Side view

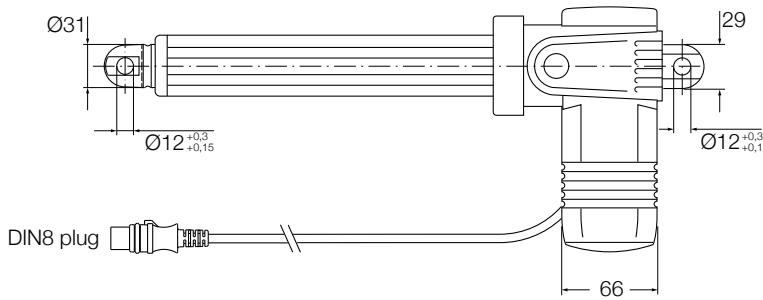

Front view

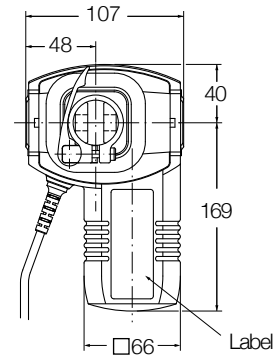


Top view

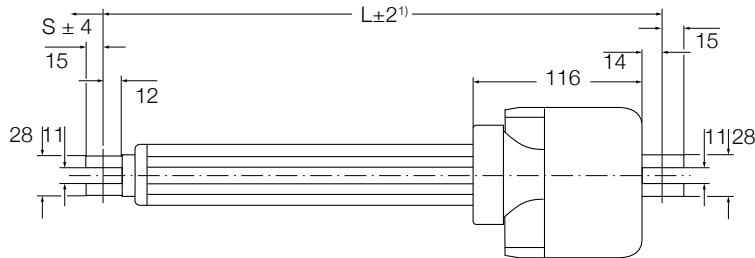


¹) S < 350 mm; L = 195 + S
S > 350 mm; L = 260 + S



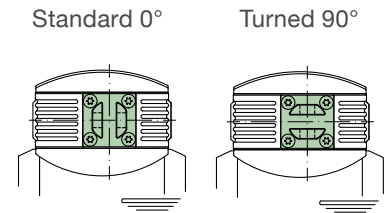



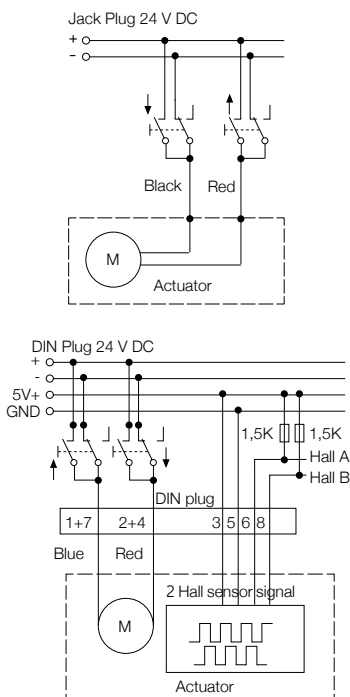


Rear view



Connecting diagrams




Suitable control units and accessories

	Control units			
	SCU	VCU	BCU	MCU
MAX 1	•	•	•	•
Operating switches				
EHA 1 				•
EHA 3 	•	•	•	
STJ 	•	•	•	
STF 				•
STE 	•	•	•	
STA 				•
 Hand switch		 Foot switch		 Desk switch

Performance diagrams


Speed-load diagram

Speed [mm/s]

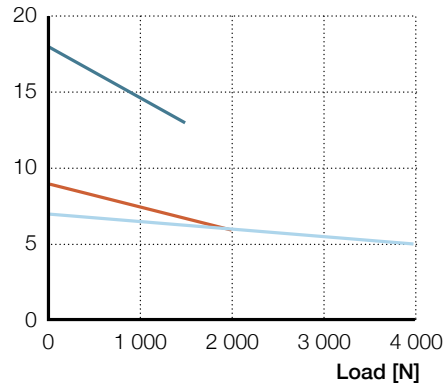

Current-load diagram

Current consumption [A]

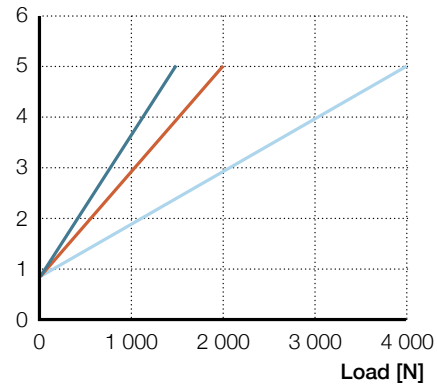


— Rated push force 1 500

— Rated push force 2 000

— Rated push force 4 000


Safety factor load conditions

Load [N]

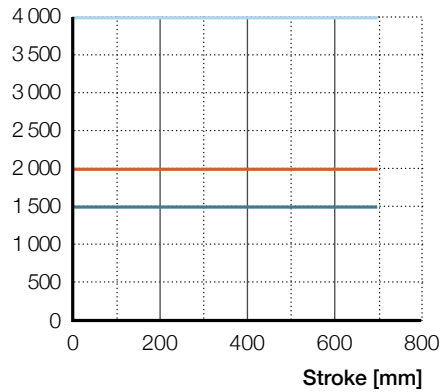


Push load reduction static
Safety factor S=1

Load [N]

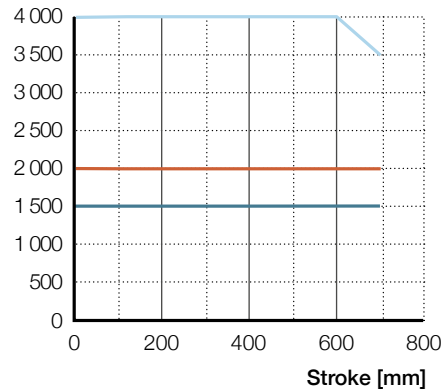

Push load reduction static
Safety factor S=2

Load [N]

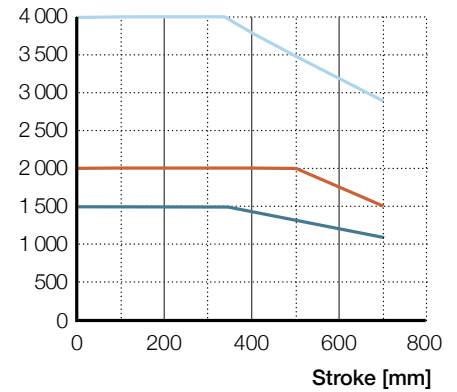

Push load reduction static
Safety factor S=4 (EN60601)

— Rated push force 1 500

— Rated push force 2 000

— Rated push force 4 000

Matrix3

Linear actuator



Benefits

- Silent operation
- Full system with control unit, switch and accessories
- Synchronization possible
- Compact and aesthetic
- Back-up nut as standard

Technical data

	Unit	MAX3..A..	MAX3..B..	MAX3..C..
Rated push load	N	8 000	4 000	3 000
Rated pull load	N	6 000 ¹⁾	4 000	3 000
Speed (full load to no load)	mm/s	5 to 7	6 to 9	13 to 18
Stroke	mm	50 to 700	50 to 700	50 to 700
Retracted length	mm	S + 215/280 ²⁾	S + 215/280 ²⁾	S + 215/280 ²⁾
Voltage	V DC	12 or 24	12 or 24	12 or 24
Power consumption	W	120	120	120
Current consumption	A	5	5,2	5,2
Duty cycle	%	10 (1/9)	10 (1/9)	10 (1/9)
Ambient temperature	°C	0 to +40	0 to +40	0 to +40
Degree of protection	IP	66S	66S	66S
Weight (at 200 mm stroke)	kg	4,5	4,2	4
Color	–	Grey	Grey	Grey


¹⁾ Max load for medical application is 5 000 N

²⁾ S ≤ 350 mm; L = S + 215


S > 350 mm; L = S + 280

Dimensional drawing


Side view

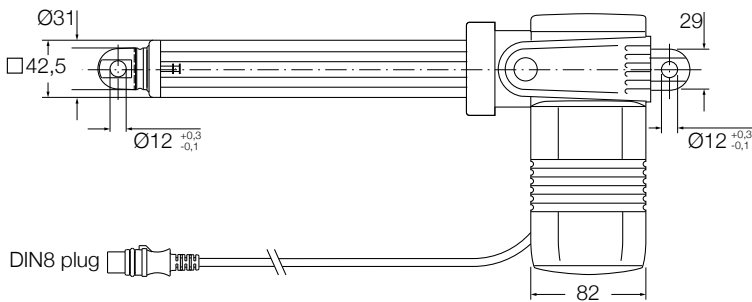

Front view

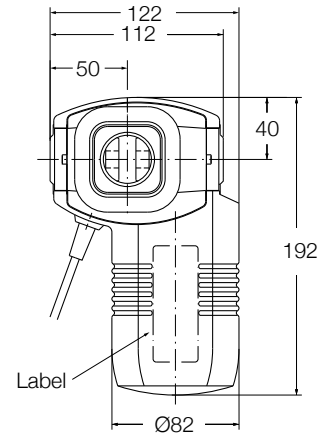


Top view

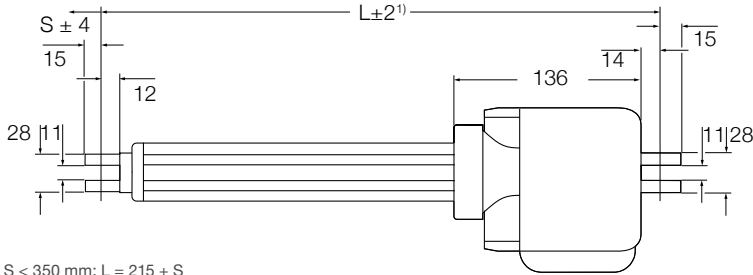


¹) S < 350 mm; L = 215 + S
S > 350 mm; L = 280 + S

Rear view

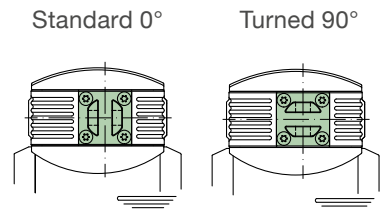

Connecting diagrams

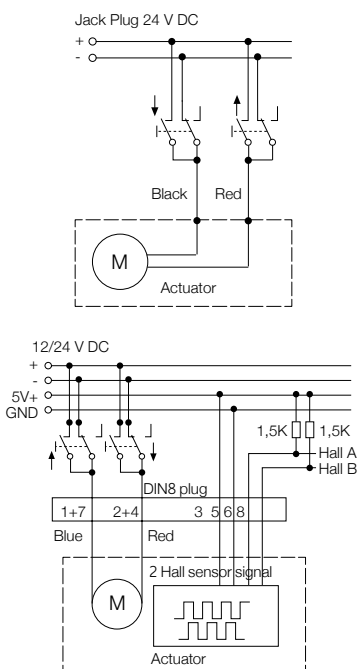

¹) Only valid for MAX 31. MAX 30 must be operated by a BCU, MCU, SCU or VCU control unit.

Suitable control units and accessories


	Control units			
	SCU	VCU	BCU	MCU
MAX 3	•	•	•	•
Operating switches				
EHA 1				•
EHA 3	•	•	•	
STJ	•	•	•	
STF				•
STE	•	•	•	
STA				•

Hand switch
 Foot switch
 Desk switch

Performance diagrams


Speed-load diagram

Speed [mm/s]

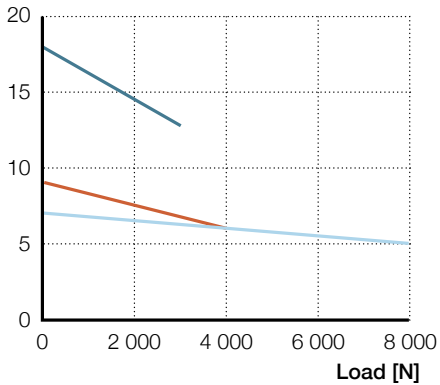

Current-load diagram

Current consumption [A]

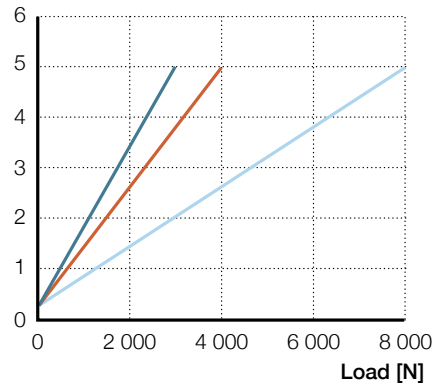


— Rated push force 3 000

— Rated push force 4 000

— Rated push force 8 000


Safety factor load conditions

Load [N]

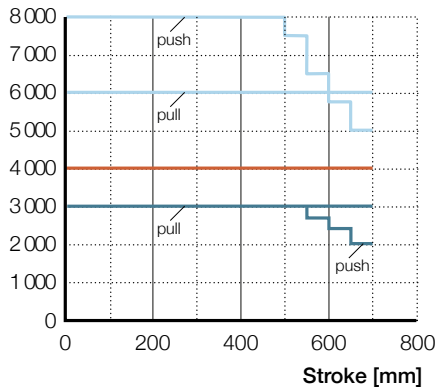


Push load reduction static
Safety factor S=1

Load [N]

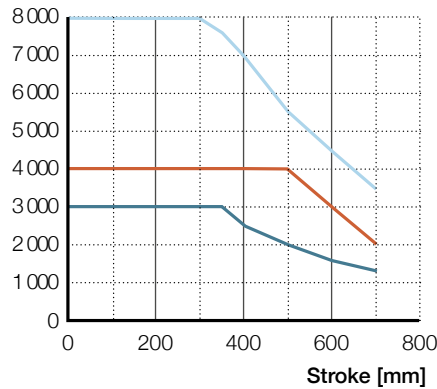

Push load reduction static
Safety factor S=2

Load [N]

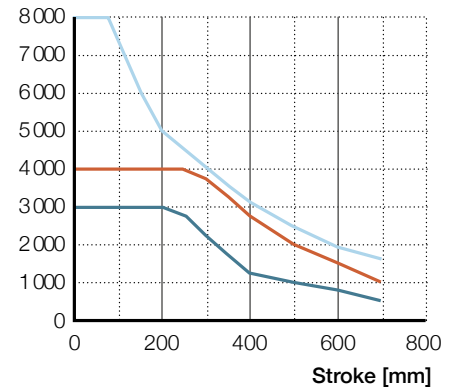

Push load reduction static
Safety factor S=4 (EN60601)

— Rated push force 3 000

— Rated push force 4 000

— Rated push force 8 000

Matrix7

Linear actuator



Benefits

- Universal power supply
- Power indicator
- Plug and play with integrated control unit
- Designed for medical devices, compliant to IEC 60601-1

Technical data

	Unit	MAX7..A..	MAX7..B..	MAX7..C..
Rated push load	N	8 000	4 000	3 000
Rated pull load	N	6 000 ¹⁾	4 000	3 000
Speed (full load to no load)	mm/s	6 to 7,5	8 to 10	13 to 18
Stroke	mm	50 to 700	50 to 700	50 to 700
Retracted length	mm	S + 215/280 ²⁾	S + 215/280 ²⁾	S + 215/280 ²⁾
Voltage	V	100-240 AC 50/60 Hz	100-240 AC 50/60 Hz	100-240 AC 50/60 Hz
Power consumption	W	180	180	180
Current consumption	100 V AC	A	3,2	3,2
	240 V AC	A	1,6	1,6
Duty cycle	%	10 (1/9)	10 (1/9)	10 (1/9)
Ambient temperature	°C	0 to +40	0 to +40	0 to +40
Degree of protection	IP	66S	66S	66S
Weight (at 200 mm stroke)	kg	4,8	4,5	4,2
Color	–	Grey	Grey	Grey


¹⁾ Max load for medical application is 5 000 N

²⁾ S < 350 mm; L = S + 215


S > 350 mm; L = S + 280

Dimensional drawing


Side view

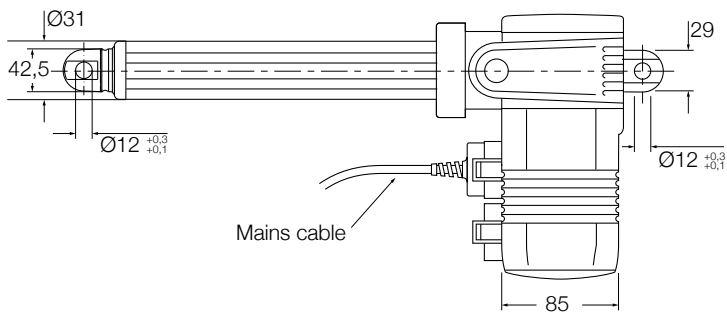


Front view

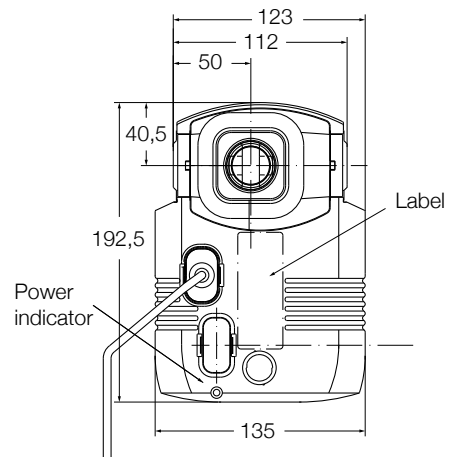

Top view

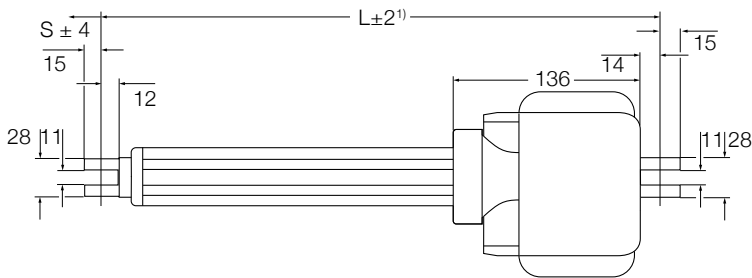


Rear view

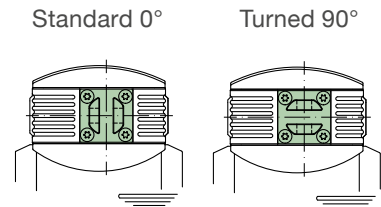





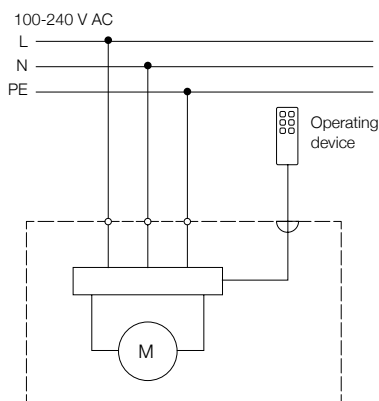




¹⁾ S < 350 mm; L = 215 + S
S > 350 mm; L = 280 + S

Connecting diagrams




Suitable operating switches

	Operating switches					
	 EHA1	 PHC	 STF	 PFP	 STA	 PAM
MAX70		•		•		•
MAX72/74	•		•		•	


 Hand switch
  Foot switch
  Desk switch

Performance diagrams

Speed-load diagram

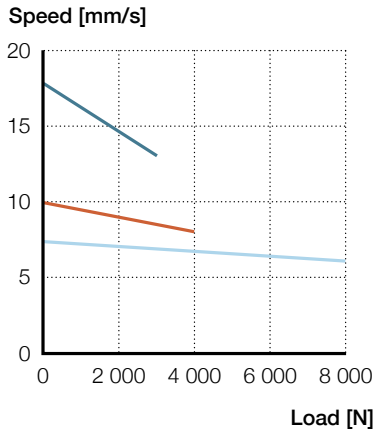


Current-load diagram

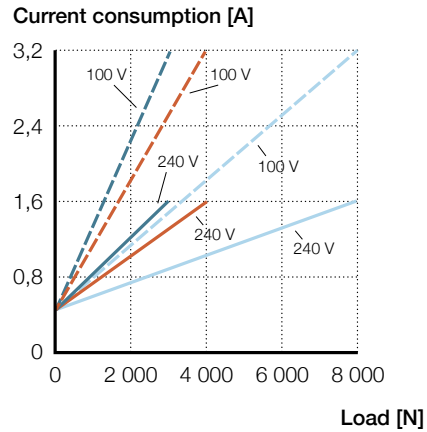


— Rated push force 3 000 — Rated push force 4 000 — Rated push force 8 000


Safety factor load conditions

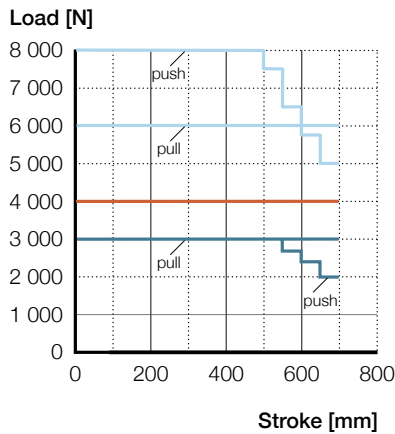

Push load reduction static
Safety factor S=1

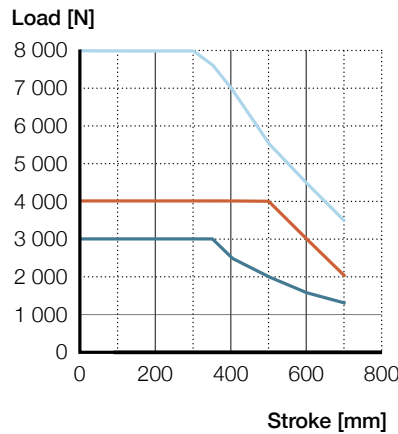

Push load reduction static
Safety factor S=2

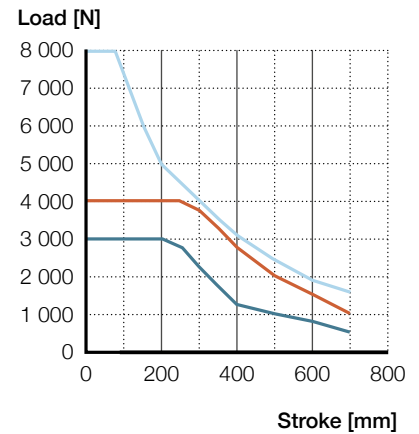

Push load reduction static
Safety factor S=4 (EN60601)

— Rated push force 3 000 — Rated push force 4 000 — Rated push force 8 000

Accessories

	Plug	Country	Designation	Order number
Straight cable 3,5 m	Schuko	DE	ZKA-140306-3500	0121723
Straight cable 3,5 m	SEV	CH	ZKA-140316-3500	0121737
Straight cable 3,5 m	UL	USA	ZKA-140355-3500	0121724
Straight cable 3,5 m	Hospital grade	USA	ZKA-140360-3500	0121732
Straight cable 3,5 m	British standard	UK	ZKA-140350-3500	0121743
Coiled cable 1,2 m / 2,2 m	Schuko	DE	ZKA-140342-1500	0121728
Coiled cable 1,2 m / 2,2 m	SEV	CH	ZKA-140378-1200	0121738
Straight polyurethane cable 3,5 m	Schuko	DE	ZKA-140422-3500	0121739
Straight polyurethane cable 3,5 m	SEV	CH	ZKA-140426-3500	0121740
Strain relief for mains cable			ZUB-952253	0102848
Tool for plugs (Jack/D-Sub/Mains)			ZWS-140375	0125322



ewellix.com

© Ewellix

All contents of this publication are the property of Ewellix, and may not be reproduced or given to third parties (even extracts) without permission. Although great care has been taken in the production of this catalog, Ewellix does not take any responsibility for damage or other loss resulting from omissions or typographical errors. The photo may differ slightly in appearance from the actual product. Due to continuous improvements being made in our products, the product's appearance and specifications are subject to change without notice.

PUB IL-06005/2-EN-November 2021

Certain image(s) used under license from Shutterstock.com.